



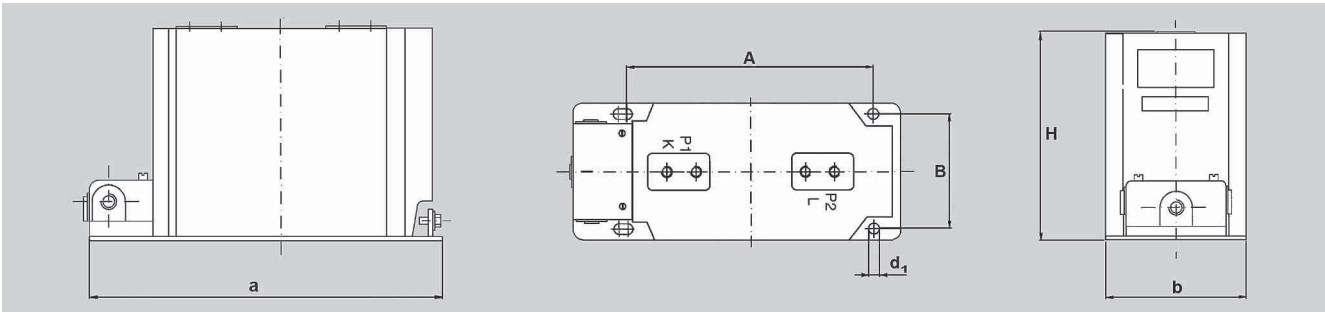


ASN

Support Type Current Transformer Indoor Block Type ASN 12 | 17,5 | 24 | 36

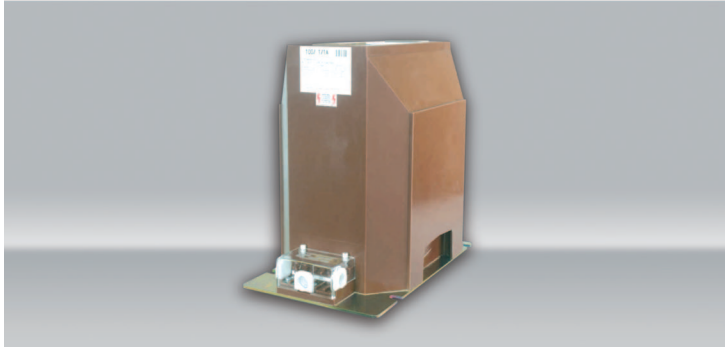

TYPE ASN Dimensions mm				
	ASN 12	ASN 17,5	ASN 24	ASN 36
A	225	225	250	300
B	175	175	200	225
a	330	330	330	403
b	198	198	198	249
d ₁	11	11	14	14
H	240	240	300	390

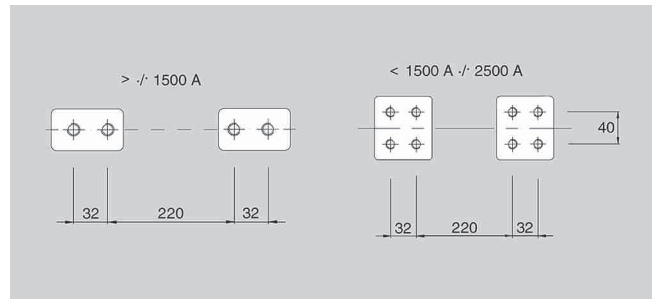

TYPE ASN					
		ASN 12	ASN 17,5	ASN 24	ASN 36
U _m	kV	12	17,5	24	36
Test voltages	kV	28 75	38 95	50 125	70 170
Rated Primary Current – I _{PN}	A	up to 1250	up to 1250	up to 1250	up to 1250
Rated Secondary Current – I _{SN}	A	1 5	1 5	1 5	1 5
Rated Short Time Thermal Current – I _{th}		up to 1000 x I _{PN} max. 100 kA			
Rated Peak Current – I _{dyn}		2,5 x I _{th}			
Core(s), Number of Cores		Must be determined on the basis of the requirements accuracy class, over-current value, burden			
Frequency	Hz	50 60			
Weight	kg	24	24	38	70

Subject to Technical Changes



GERMANY HAMBURG • WIRGES • KIRCHAICH • DRESDEN
AUSTRIA MARCHTRENK | HUNGARY KECSKEMÉT | CHINA SHANGHAI | USA LAVONIA

