





ASS

Support Type Current Transformer Indoor Block Type ASS 12 | 17,5 | 24 | 36

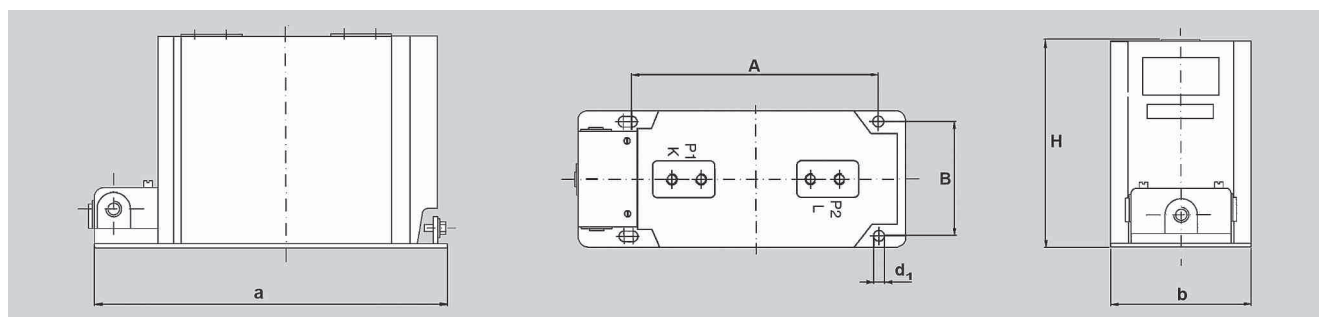

TYPE ASS Dimensions mm				
	ASS 12	ASS 17,5	ASS 24	ASS 36
A	270	270	280	300
B	125	125	150	225
a	360	360	355	403
b	148	148	178	249
d ₁	12	12	14	14
H	220	220	280	390

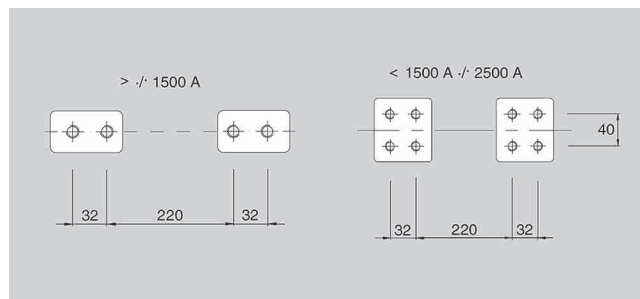

TYPE ASS					
		ASS 12	ASS 17,5	ASS 24	ASS 36
U _m	kV	12	17,5	24	36
Test voltages	kV	28 75	38 95	50 125	70 170
Rated Primary Current – I _{PN}	A	up to 2500	up to 2500	up to 2500	up to 1250
Rated Secondary Current – I _{SN}	A	1 5	1 5	1 5	1 5
Rated Short Time Thermal Current – I _{th}		up to 1000 x I _{PN} max. 100 kA			
Rated Peak Current – I _{dyn}		2,5 x I _{th}			
Core(s), Number of Cores		Must be determined on the basis of the requirements accuracy class, over-current value, burden			
Frequency	Hz	50 60			
Weight	kg	20	20	28	70

Subject to Technical Changes



GERMANY HAMBURG • WIRGES • KIRCHAICH • DRESDEN
AUSTRIA MARCHTRENK | HUNGARY KECSKEMÉT | CHINA SHANGHAI | USA LAVONIA

